


MTP® 12f Harness Method

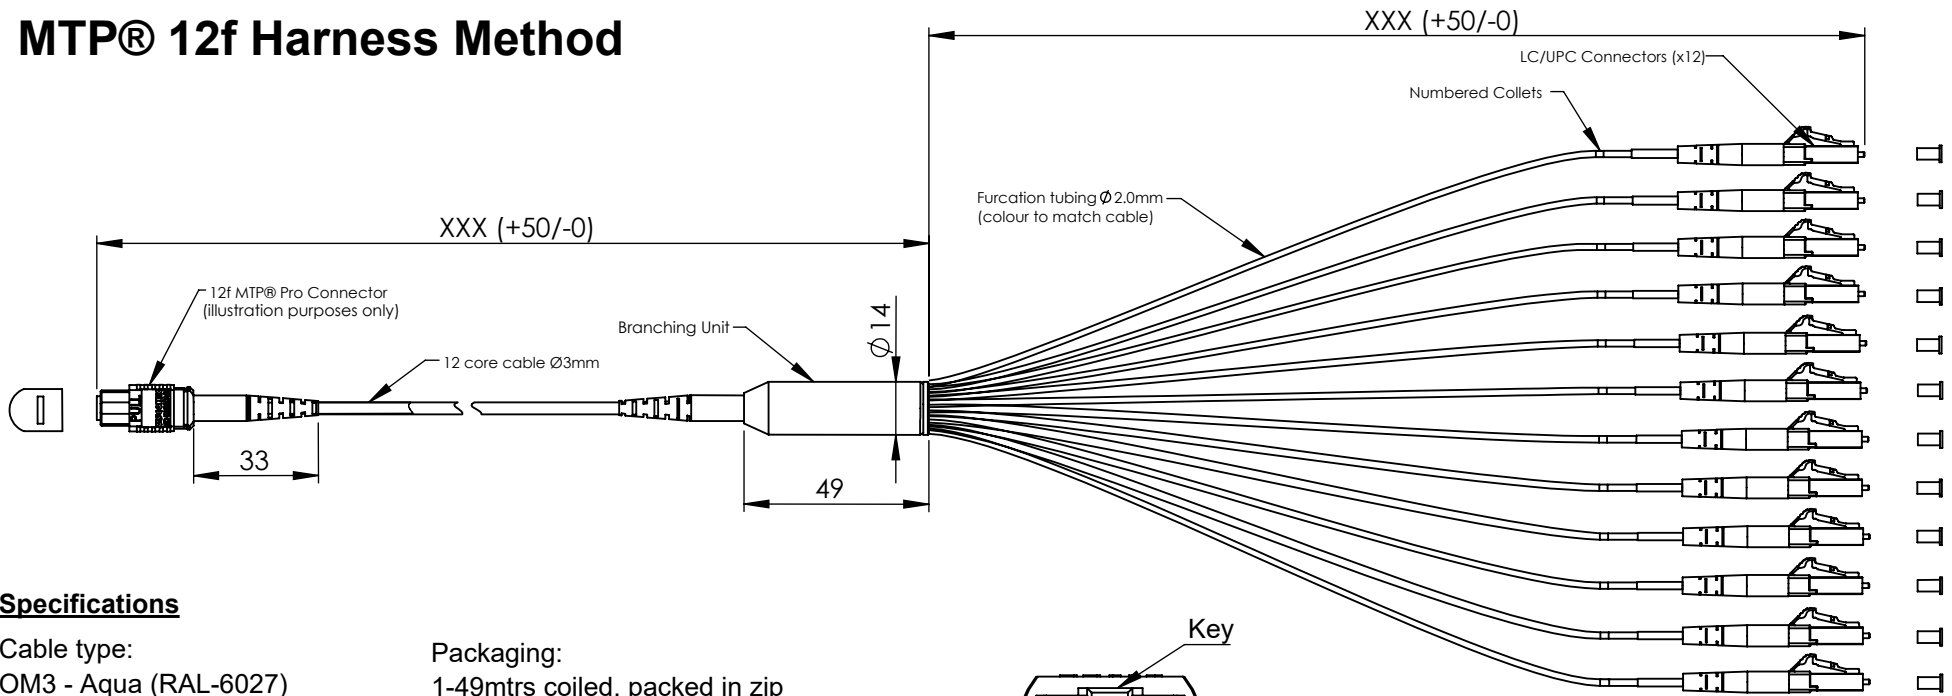

Specifications

Cable type:



- OM3 - Aqua (RAL-6027)
- OM4 - Aqua (RAL-6027)
- OM4 - Heather Violet (RAL-4003)
- OS2 - Yellow (RAL-1018)

Packaging:

1-49mtrs coiled, packed in zip seal bags and 50+ on a reel

Connector Mating	IL Typical	IL Max	Return Loss
MTP® MM Pro Elite	0.10dB	0.35dB	N/A
MTP® SM Pro Elite	0.10dB	0.35dB	>60dB

ch	Colour	Numbered Collets
#1	Blue	1
#2	Orange	2
#3	Green	3
#4	Brown	4
#5	Slate	5
#6	White	6
#7	Red	7
#8	Black	8
#9	Yellow	9
#10	Violet	10
#11	Rose(Pink)	11
#12	Aqua	12



Dx Clip Method			
Type A		Type B	
Clip Side B	Clip Side A	Clip Side B	Clip Side A
1	12	1	7
2	11	2	8
3	10	3	9
4	9	4	10
5	8	5	11
6	7	6	12

ISSUE NO:	1	2	3	4	5	6	Customer	
Date	08/01/14	12/05/16	18/01/2021	02/09/2021				
Checked by	P.Davenport	P.Davenport	K.Thomas	K.Thomas				
Product App.	B.Williams	B.Williams	B.Williams	B.Williams				
Approved by			M.Lenihan	G.Ratcliffe				
Drawn	Material	Finish		Tolerances unless otherwise Stated		Title	Drawing Number	
L.Smith	RoHS compliant			All Dimensions in millimeters		MTP® 12f Harness Method	DN-0976	
Scale								
1:2								